

PREVENTIVE FIRE PROTECTION

JE-H(St)H...Bd FE180 E30 L


Fire alarm cable max. 225V, pyrofil® Keram

Halogen-free, with improved fire characteristics

with reference to VDE 0815

Circuit integrity (FE180) in accordance with VDE 0472-814, IEC 60331, EN 50200

System Circuit integrity E30 in accordance with DIN 4102-12

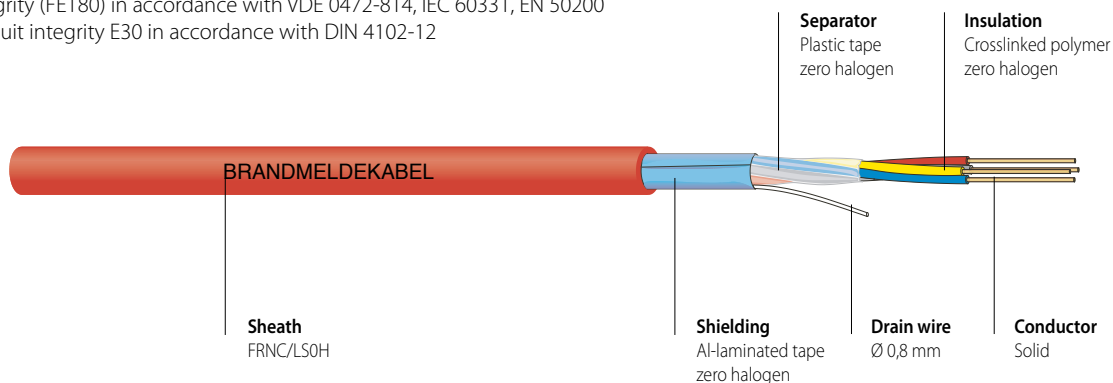

PRODUCT INFORMATION



APPLICATION

Safety cables are used in all situations that require special protection against fire and flame damage for people and equipment and where a high degree of safety conditions must be fulfilled. Suitable for indoor applications. For outdoor applications, protection must be provided against exposure to direct sunlight. The cable should only be laid directly in earth or water if a protective conduit is used. These cables correspond to the demands of System Circuit integrity E30 in accordance with DIN 4102-12. System Circuit integrity is guaranteed at an operating voltage up to 110V. Permitted operating temperature at conductor +70°C.

CONSTRUCTION

Conductor	Bare copper, solid, 0.8mm diameter, VDE 0815
Insulation	Fire-resistant, crosslinked, high-performance Keram special compound, EN 50290-2-26
Core colours	VDE 0815, bundles identified by numbered tape
Separator	PEPT "Plastic Tape"
Shielding	Al-laminated tape with tinned copper drain wire Ø 0.8mm
Outer sheath	Flame retardant polyolefin compound, VDE 0819 part 107, EN 50290-2-27 and VDE 0250-214 „HM 2“
Sheath colour	Red
Imprint	DATWYLER PYROFIL KERAM „BRANDMELDEKABEL“ JE-H(ST)H...BD FE180 E30 L „N X 2 X MM“ VDE REG. NO.9361 „ORDER NO.“ SWISS MADE „METRE MARKING“ or on request

ELECTRICAL PROPERTIES

Insulation resistance	min. 100 MΩ x km
Loop resistance	max. 73.2 Ω/km at 0.80 mm
Capacitance unbalance	max. 120 nF/km at 800 Hz
Capacitance coupling	K max. 200 pF/100m at 800 Hz
Rated voltage	max. 225 V
Test voltage	500 V, 50 Hz Core/Core 2000 V, 50Hz, Core/Screen

GENERAL PROPERTIES

Minimum bending radius	during installation	7,5 x D (D = outer diameter)
	permanent installation	2,5 x D
Crush resistance	≥ 1000 N/10 cm	
Impact	≥ 10 Impacts	
Operating temperature	permanent installation	-30°C to +70°C
	during installation	-5°C to +50°C
 Zero halogen,		
 non corrosive gases		
 Flame propagation		
 Flame spread		
 Smoke density		
 Circuit integrity [FE/PH]		
 System Circuit integrity [E30]		

JE-H(St)H...Bd FE180 E30 L**Fire alarm cable max. 225V, pyrofil® Keram**Halogen-free, with improved fire characteristics
with reference to VDE 0815

Circuit integrity (FE180) in accordance with VDE 0472-814, IEC 60331, EN 50200

System Circuit integrity E30 in accordance with DIN 4102-12

PRODUCT INFORMATION

Article No.	No. of cores x conductor diameter					Cu content	Total weight	Outer diameter	Fire load
	n x mm					kg/km	app. kg/km	app. mm	kWh/m
188 377	1	x	2	x	0.80	15	40	5.5	0.095
188 374	2	x	2	x	0.80	25	56	6.0	0.123
188 375	4	x	2	x	0.80	45	96	8.7	0.21

Additional dimensions available on request.